



Dimension: 159 × 98 × 38mm

CE

Features:

- Universal AC input / Full range
- Small volume, low weight, high efficiency
- Protections : short circuit/over load/over voltage
- Cooling by free air convection
- LED indicator for power on
- 100% full load burn-in test
- 1 Year warranty

SPECIFICATION

	Model	T-60A			T-60B					
Output	DC voltage	CH1:+5V	CH2:+12V	CH3:-5V	CH1:+5V	CH2:+12V	CH3:-12V			
	Voltage tolerance	± 2%	± 6%	± 6%	± 2%	± 6%	± 6%			
	Rated current	5A	2.5A	0.5A	5A	2.5A	0.5A			
	Current range	0.6 ~ 5A	0.2 ~ 2.5A	0 ~ 0.5A	0.6 ~ 5A	0.2 ~ 2.5A	0 ~ 0.5A			
	Rated power	57.5W			61W					
	Ripple&noise	80mVp-p	100mVp-p	80mVp-p	80mVp-p	100mVp-p	100mVp-p			
	DC voltage ADJ. range	CH1: -9%~+10%								
Input	Setup, rise, hold up time	600ms,50ms,30ms/230VAC.								
	Voltage range	90 ~ 264VAC 47 ~ 63Hz, 127 ~ 373VDC								
	AC current	1.8A/115V 0.9A/230VAC								
	Efficiency	73%			74%					
	Inrush current	Cold start 20A/115V 40A/230VAC								
Protection	leakage current	< 2mA/240VAC								
	Overload	Rated output power 110% ~ 150% Start overload protection								
		Protection type: hiccup mode, auto-recovery after fault condition is removed								
	Over voltage	CH1: 115% ~ 135%								
Environment		Protection type: hiccup mode, auto-recovery after fault condition is removed								
	Working temp, humidity	-10°C ~ +60°C; 20% ~ 90%RH (Please refer to "derating curve")								
	Storage temp, humidity	-20°C ~ +85°C; 10% ~ 95%RH Non-condensing								
Safety	Withstand vibration	10 ~ 500Hz, 2G 10min./1Cycle, Period for 60min, Each axes								
	Withstand voltage	I/P-O/P: 1.5KVAC I/P-FG: 1.5KVAC O/P-FG: 0.5KVAC								
	Isolation resistance	I/P-O/P: I/P-FG, O/P-FG: 100M Ohms/500VDC								
Fit standard	Safety standard	Fit UL1012								
	EMC Standard	Fit EN55022, CLASS A								
Others	Weight	0.56kg 159*98*38mm (L*W*H)								
	Packing	0.56kg/45pcs/26kg								


Note: 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.

2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.

3. Tolerance : includes set up tolerance, line regulation and load regulation.

Mechanical specification


Unit:mm

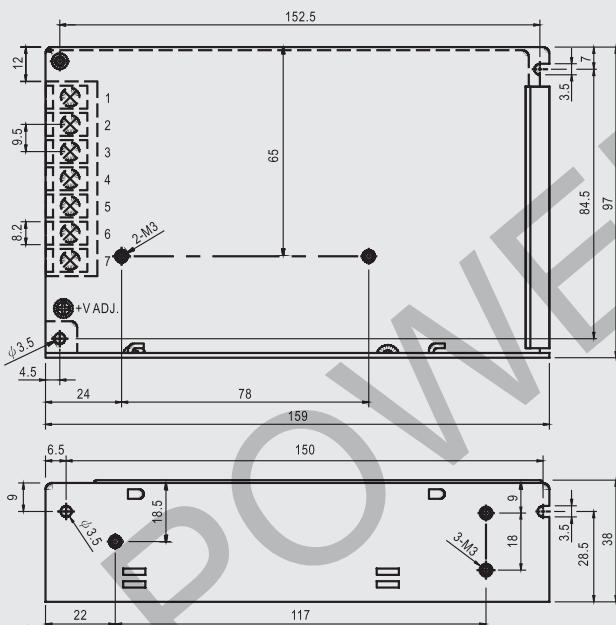


Terminal Pin No.Assignment

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	4	DC OUTPUT V3
2	AC/N	5	DC OUTPUT V2
3	FG \pm	6	DC OUTPUT COM
		7	DC OUTPUT V1

Block diagram

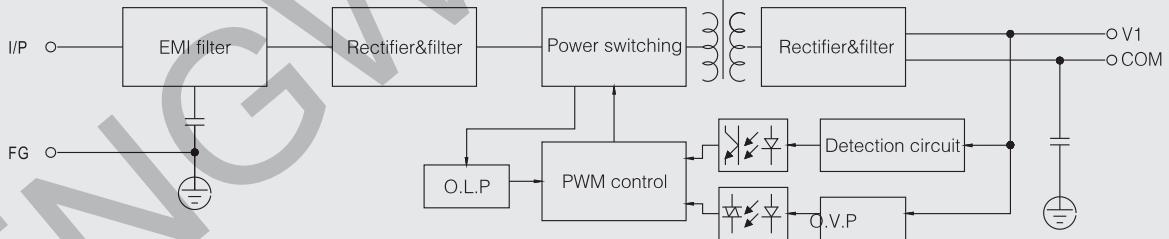

Derating curve

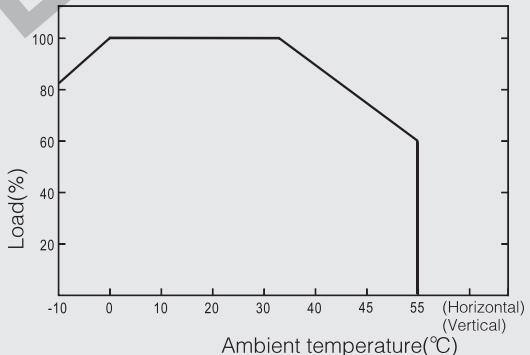

Static characteristic

